

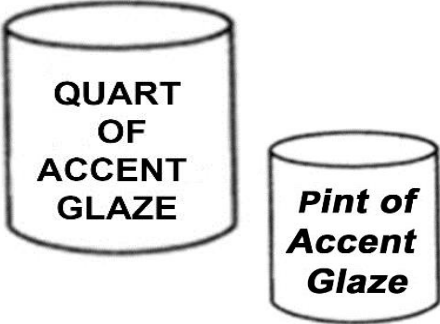
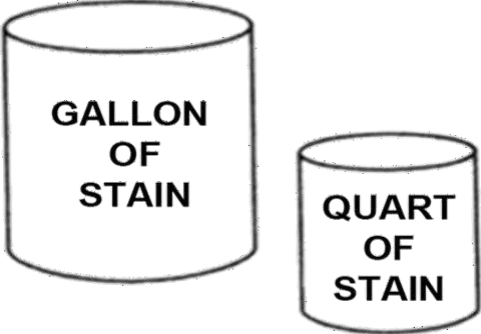


Classic Finishing Instructions

Paint Colors  Part A  Part B	Our paints are a tinted conversion varnish. Included in your paint kit will be the paint varnish and a container of catalyst. The entire container of catalyst should be mixed with the paint varnish you receive for at least two minutes. Spray equipment must be used for this application. This cannot be hand wiped or applied with a paint brush. After the catalyst is mixed with the varnish it must be used within 24 hours. A gallon of tinted varnish will come with an 11 oz. container of catalyst, a quart will come with a 2.7 oz. container, and a pint will come with a 1.4 oz. container.
Dye Stains 1 GALLON OF DYE WILL COME WITH 1 GALLON OF STAIN  Gallon of Dye  Gallon of Stain 1 QUART OF DYE WILL COME WITH 1 QUART OF STAIN  QUART OF DYE  Quart of Stain	We will include containers of dye and stain. First apply the dye, then when dry (this takes a very short time) apply the stain. When applying the dye, it is better to use less than you think you need. After applying the stain, you can re-apply more dye to deepen the color. You can add more dye but once on, you cannot make it lighter. CHESTNUT Dye will include Brown Dye and Briarwood Stain FRONTIER Dye will include Frontier Dye and Frontier Stain MOCHA Dye will include Brown Dye and Mocha Stain Spray equipment must be used for this application. This cannot be hand wiped or applied with a paint brush. You must put on a top coat when dry.
Top Coat  Part A  Part B	Included in your kit will be 1 gallon of varnish and a container of catalyst. The entire container of catalyst should be mixed with the varnish you receive for at least two minutes. Spray equipment must be used for this application. This cannot be hand wiped or applied with a paint brush. After the catalyst is mixed with the varnish it must be used within 24 hours. A gallon of varnish will come with an 11 oz. container of catalyst and a quart will come with a 2.7 oz. container.
Use products in a well-ventilated room	



Classic Finishing Instructions

Accent Glaze 	We recommend spray equipment for this application. You can apply with a brush, or foam brush as well. Spray or brush on the accent glaze. When it is dry, wipe off excess to your discretion. How little or how much you remove will be determined by the look you are trying to achieve. You must put on a top coat when dry.
Wiping Stains 	We recommend spray equipment for this application. You can apply with a soft, clean wiping cloth as well. Apply sparingly until you have the desired look you are trying to achieve. You must put on a top coat when dry.
Highlight pens 	Apply highlight pen as necessary to achieve the desired look you want. You must put on a top coat when dry.
Paint Marker 	Apply as necessary to repair painted cabinets.
Wax Stick 	Apply as necessary to repair stained cabinets.
Spray Paint 	Apply sparingly until you have the desired amount of coverage you are trying to achieve.
Use products in a well-ventilated room July 2026	